




BlackBerry 7510 Logic Board Replacement

Written By: Neil Johnson

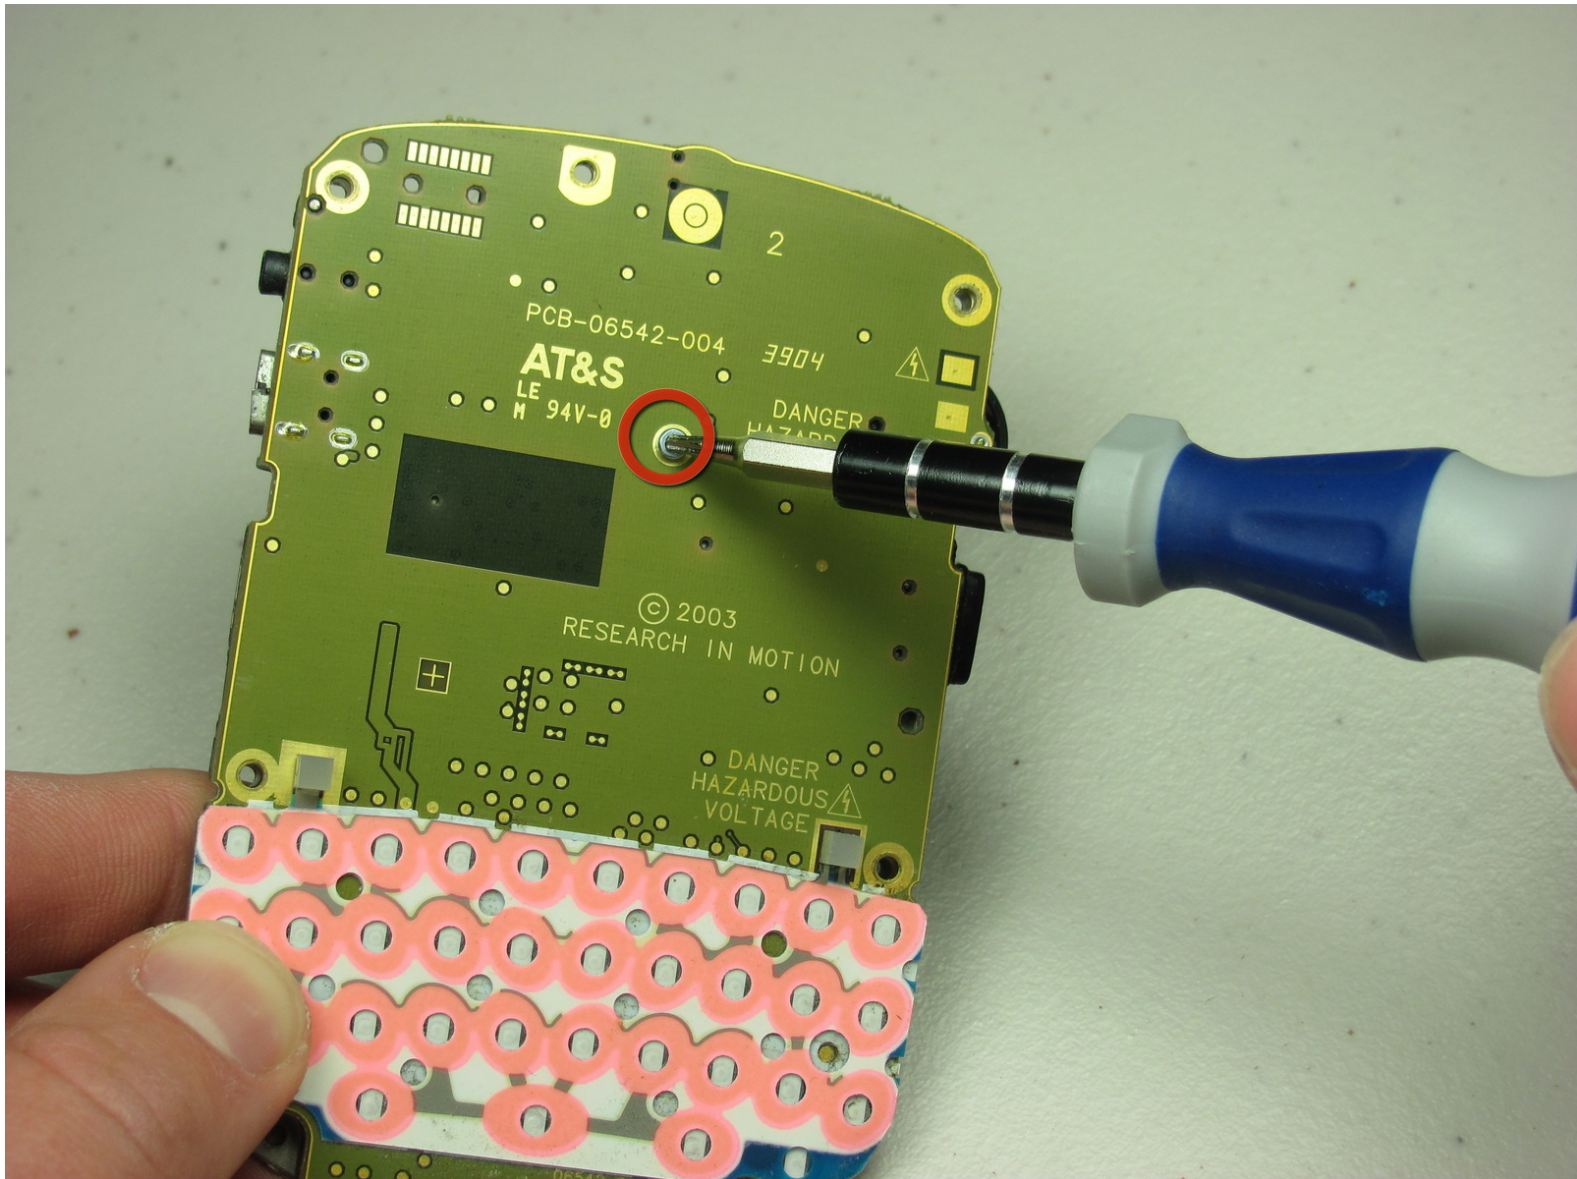

INTRODUCTION

This is a guide on how to replace your logic board.



TOOLS:

- [T6 Torx Screwdriver](#) (1)
-

Step 1 — Back Face of Phone



i Remove the battery cover and battery before continuing.

- Remove the six T6 screws.

Step 2



- Pry open the back cover.

Step 3





- Lift off the back cover.

Step 4



- Remove the two T6 screws.

Step 5

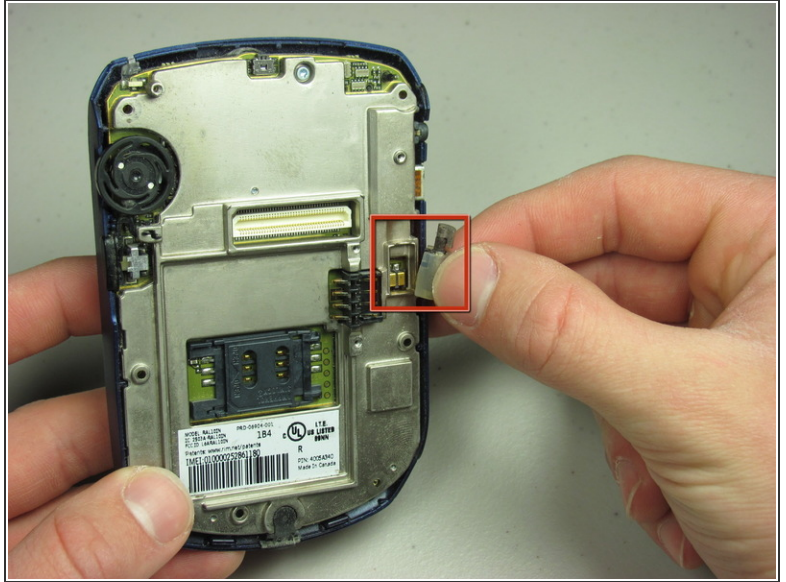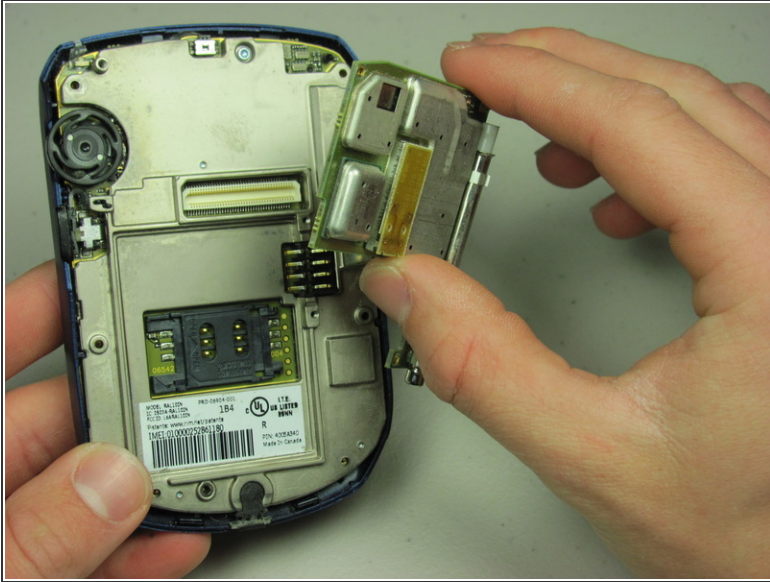


- Remove the daughterboard.
- Remove the exposed vibration motor.

Step 6 — Logic Board




- Unscrew to remove the back plate

Step 7

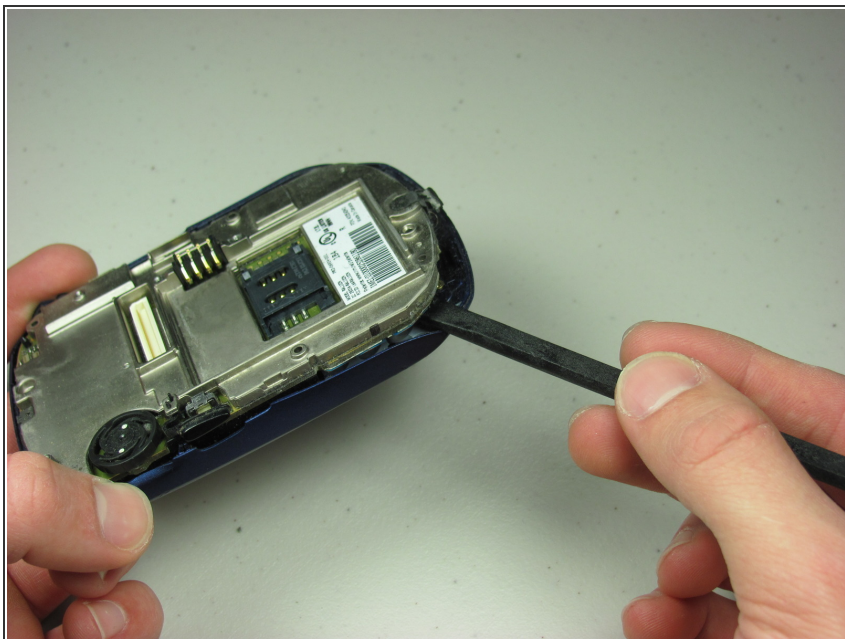


- Carefully pry off back plate

Step 8

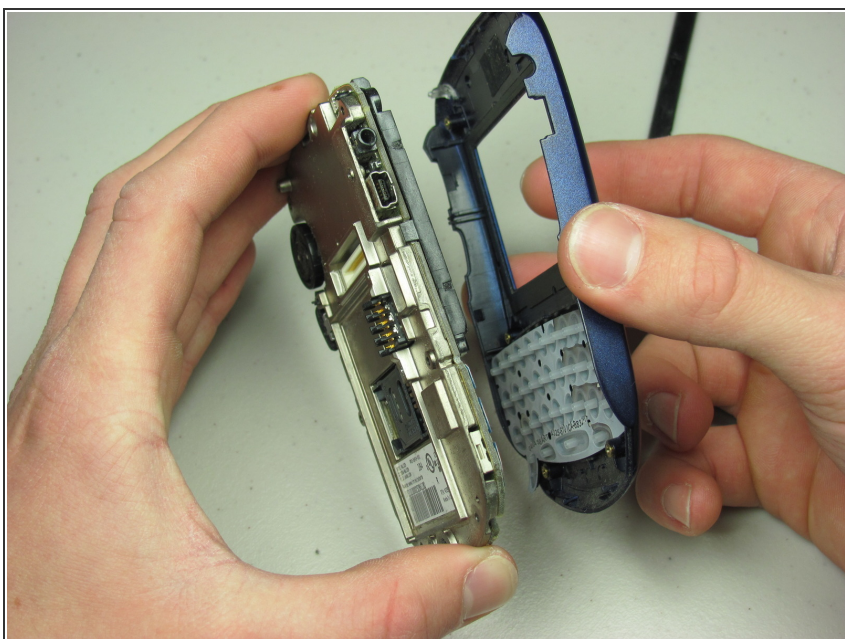



- Take off front cover and keypad

Step 9

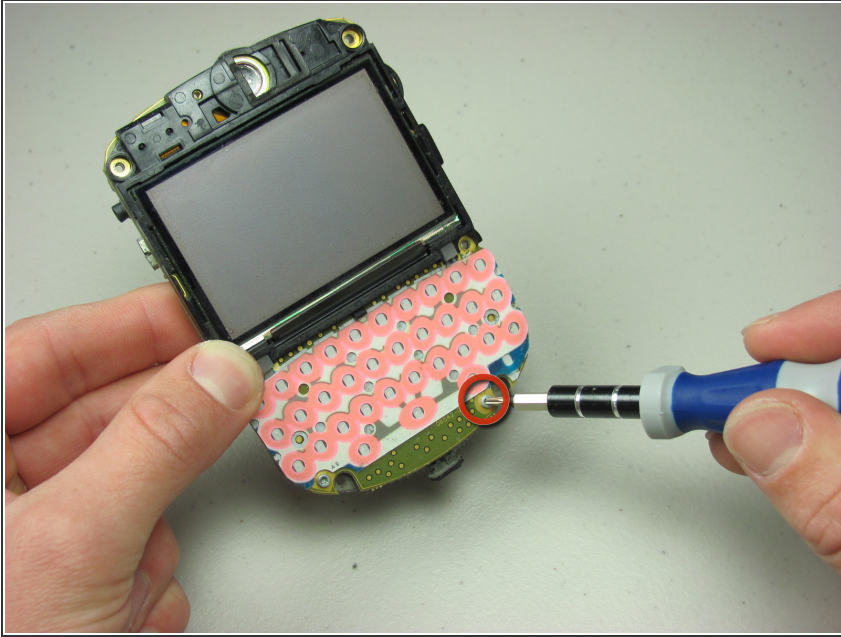



- Remove one screw in the front

Step 10

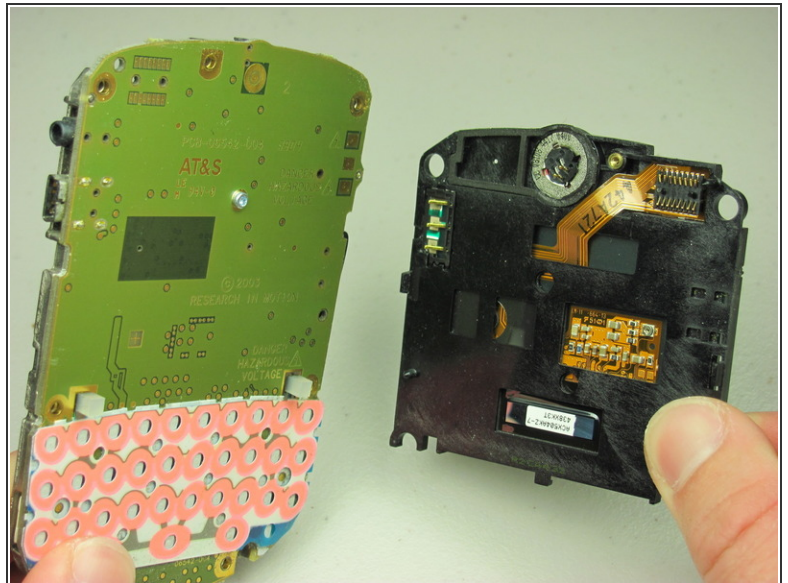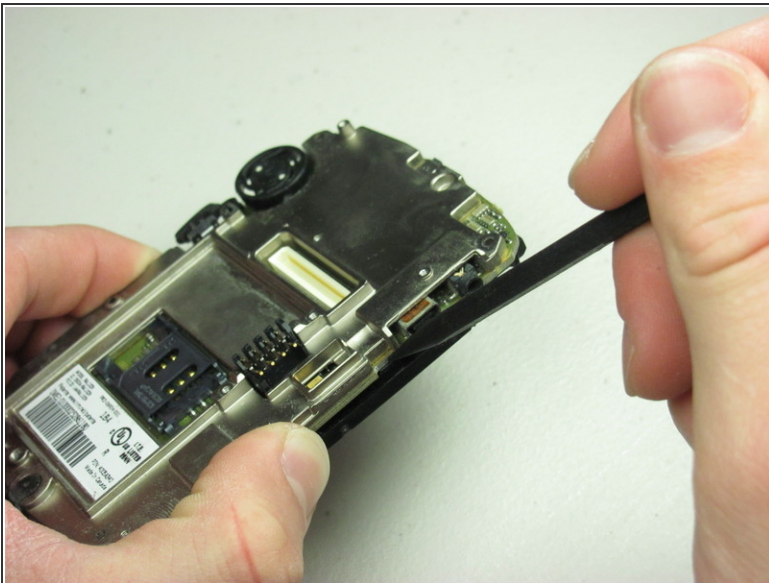

- Pry the two parts apart
- The screen is now apart from the phone

Step 11

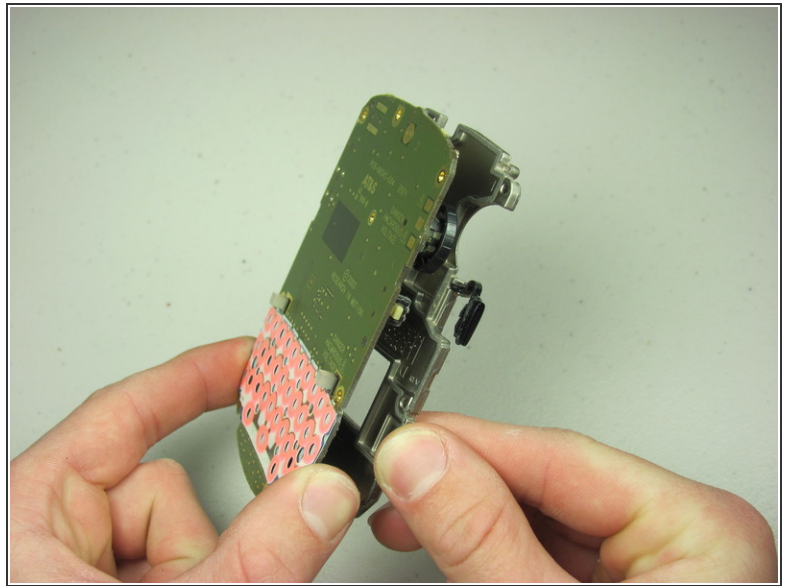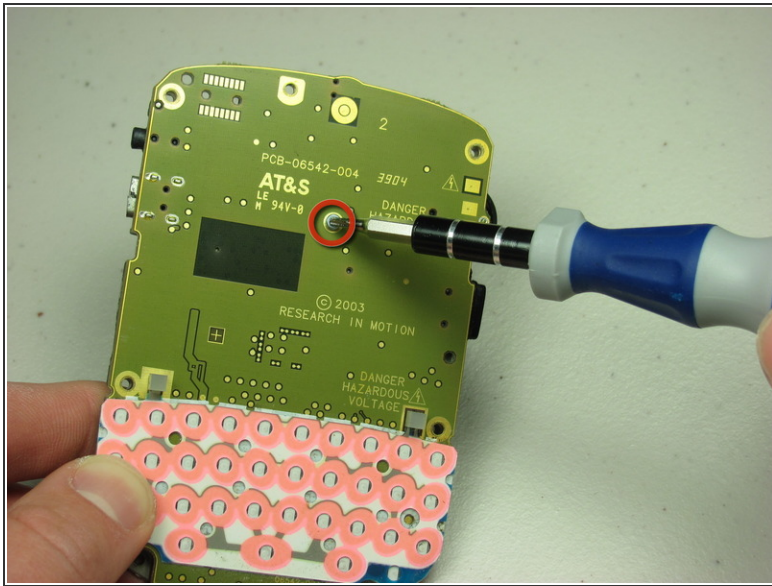

- Unscrew center screw
- Replace with new logic board

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-16 09:29:21 PM.